



## STRENX 700 MC

### GENERAL PRODUCT DESCRIPTION

The high-strength structural steel at 700 MPa Strenx™ 700 MC is a hot-rolled structural steel made for cold forming, with a minimum yield strength of 700 MPa for stronger and lighter structures. Strenx 700 MC meets or exceeds the requirements of S700MC in EN 10149-2. Typical applications include a wide range of components and parts in demanding load-bearing structures. Strenx 700 MC comes in coils, slit coils or cut-to-length sheets.

#### Dimension Range

Strenx 700 MC is available in thicknesses of 2.00-10.00 mm and widths up to 1600 mm as coils, slit coils or cut to length sheets in lengths up to 16 meters.

### MECHANICAL PROPERTIES

Thickness (mm)	Yield strength $R_{eH}$ <sup>1)2)</sup> (min MPa)	Tensile strength $R_m$ (MPa)	Elongation $A_{80}$ <sup>4)</sup> (min %)	Elongation $A_5$ (min %)	Min. inner bending radius for a 90° bend <sup>3)</sup>
2- 3	700	750- 950	10	12 <sup>5)</sup>	0.8 x t
3.01- 6	700	750- 950		12	1.2 x t
6.01- 10	700	750- 950		12	1.6 x t

The mechanical properties are tested in the longitudinal direction.

<sup>1)</sup> If ReH is not applicable then Rp 0,2 is used.

<sup>2)</sup> On thicknesses >8 mm the minimum yield strength may be 20MPa lower.

<sup>3)</sup> For both longitudinal and transverse direction.

<sup>4)</sup>  $A_{80}$  value applies for sheet thickness < 3.00 mm

<sup>5)</sup>  $A_5$  value applies for sheet thickness  $t \geq 3$ mm.

# STRENX 700 MC

## Impact Properties

Grade	Min. impact energy for longitudinal testing Charpy V 10x10 mm test specimens	Test temperature
700 MC D	40 J	-20 °C
700 MC E	27 J	-40 °C

Impact testing according to EN ISO 148-1 is performed on thicknesses  $\geq 6$  mm. The specified minimum value corresponds to a full-size specimen.

## CHEMICAL COMPOSITION (LADLE ANALYSIS)

C (max %)	Si <sup>1)</sup> (max %)	Mn (max %)	P (max %)	S (max %)	Al <sub>tot</sub> (min %)	Nb <sup>2)</sup> (max %)	V <sup>2)</sup> (max %)	Ti <sup>2)</sup> (max %)
0.12	0.21	2.10	0.020	0.010	0.015	0.09	0.20	0.15

<sup>1)</sup> If the material is to be hot-dip galvanized according to category A or category B in EN 10149-2 this must be specified at the time of order. Other galvanizing classes with higher Si-content are available after agreement.

<sup>2)</sup> Sum of Nb, V and Ti = max 0.22%

The steel is grain refined.

## Carbon equivalent CET(CEV)

Thickness (mm)	2 - 10 mm
Typical CET (CEV)	0.25 (0.39)

$$CET = C + \frac{Mn + Mo}{10} + \frac{Cr + Cu}{20} + \frac{Ni}{40}$$

$$CEV = C + \frac{Mn}{6} + \frac{Cr + Mo + V}{5} + \frac{Cu + Ni}{15}$$

## TOLERANCES

More details are given on [www.ssab.com](http://www.ssab.com).

### Thickness

Tolerances according to Strenx Thickness Guarantees. Strenx Guarantees offer considerably narrower thickness tolerances compared to EN 10 051.

### Length and Width

Width and length tolerances according to SSAB standard. The SSAB standard offer narrower width and length tolerances compared to EN 10 051. Length tolerances only apply for cut to length sheets.

### Shape

Tolerances according to EN 10 051. Narrower tolerances according to the SSAB standard are available on request.

### Flatness

Tolerances according to Strenx Flatness Guarantees Class A. Strenx Flatness Guarantees offer narrower tolerances compared to EN 10 051. Flatness guarantees only apply for cut to length sheets.

### Surface Properties

According to EN 10 163-2 Class A, Subclass 3.

# STRENX 700 MC

## DELIVERY CONDITIONS

Thermomechanically Rolled. Strenx 700 MC is available in as rolled or pickled surface condition with mill or cut edge.


## FABRICATION AND OTHER RECOMMENDATIONS

### **Welding, bending and machining**

Strenx 700 MC has good welding, cold forming and cutting performance.

Strenx 700 MC is a cold forming steel not suited for heat treatments at temperatures above 580°C since the material then may lose its guaranteed properties.

For information concerning fabrication, see SSAB's brochures on [www.ssab.com](http://www.ssab.com) or consult Tech Support, [techsupport@ssab.com](mailto:techsupport@ssab.com). Appropriate health and safety precautions must be taken when bending, welding, cutting, grinding or otherwise working on the product.

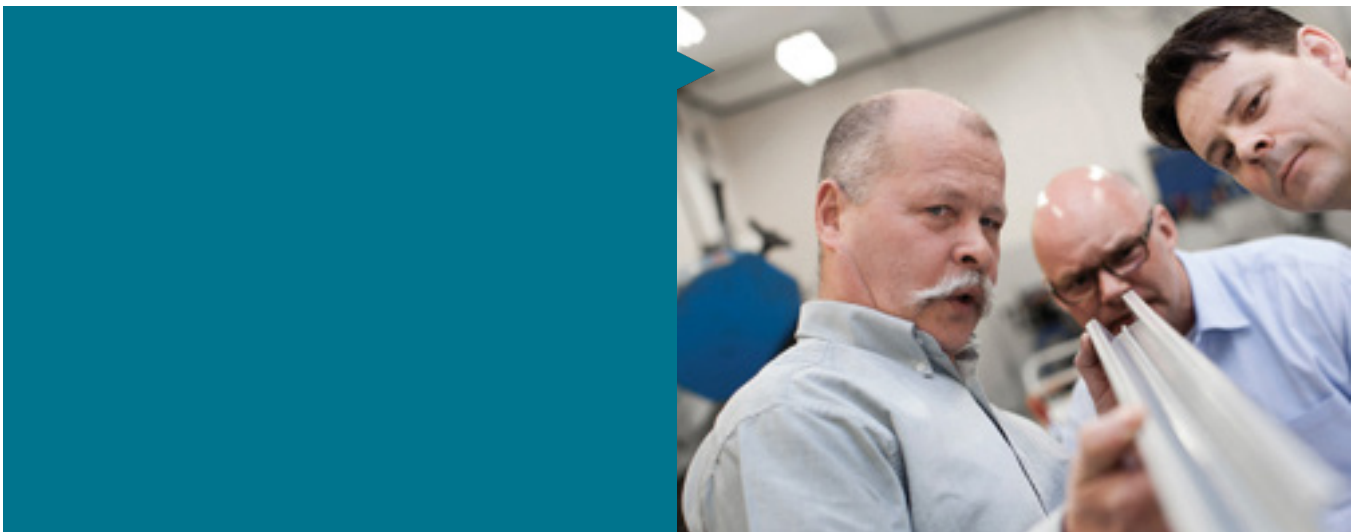

The UK English version of this document shall prevail in case of discrepancy. Download the latest version of this document at [www.ssab.com](http://www.ssab.com)

Hardox, Strenx, Docol, Dogal, Domex, Toolox, Laser, Armox, Ramor, GreenCoat are trademarks of SSAB Technology AB, Sweden

[www.ssab.com](http://www.ssab.com)

DATA SHEET 2008 STRENX 700 MC 2015-04-08

**SSAB**