



## STRENX 700 MC PLUS

### STRENX 700 MC PLUS

#### GENERAL PRODUCT DESCRIPTION

The high-strength structural steel with excellent formability  
Strenx™ 700 MC Plus is a high-strength structural steel with advanced cold formability and impact toughness for highly demanding applications.

Strenx 700 MC Plus meets or exceeds the requirements of S700MC in EN 10149-2. It is typically used in highly demanding applications that require superior bendability, high impact toughness in cold conditions and the ability to cut mechanically. Strenx 700 MC Plus comes in cut-to-length sheets.

#### Dimension Range

Strenx 700 MC Plus is available as cut to length sheets in thicknesses of 3.00-12.00 mm, widths up to 1525 mm and lengths up to 13 meters.

#### MECHANICAL PROPERTIES

Thickness (mm)	Yield strength $R_{eH}^{1)2)}$ (min MPa)	Tensile strength $R_m$ (MPa)	Elongation $A_5$ (min %)	Min. inner bending radius for a 90° bend <sup>3)</sup>
3- 10	700	750- 950	13	1.0 x t
10.01- 12	700	750- 950	13	1.5 x t

The mechanical properties are tested in the longitudinal direction.

<sup>1)</sup> If ReH is not applicable then Rp 0,2 is used.

<sup>2)</sup> On thicknesses >8 mm the minimum yield strength may be 20MPa lower.

<sup>3)</sup> For both longitudinal and transverse direction.

#### Impact Properties

Minimum energy for test on longitudinal Charpy V 10x10 mm test specimens	Test temperature
40 J	-60 °C

Impact testing in the transverse direction is available if specified at the time of order.

Impact testing according to EN ISO 148-1 is performed on thicknesses  $\geq 5$ mm. The specified minimum value corresponds to a full-size specimen.

# STRENX 700 MC PLUS

## CHEMICAL COMPOSITION (LADLE ANALYSIS)

C (max %)	Si (max %)	Mn (max %)	P (max %)	S (max %)	Al <sub>tot</sub> (min %)	Nb <sup>1)</sup> (max %)	V <sup>1)</sup> (max %)	Ti <sup>1)</sup> (max %)
0.12	0.25	2.10	0.020	0.010	0.015	0.09	0.20	0.15

The steel is grain refined.

<sup>1)</sup>Sum of Nb, V and Ti = max 0.22%

## Carbon equivalent CET(CEV)

Thickness (mm)	3 - 11.49 mm	11.50 - 12 mm
Typical CET (CEV)	0.24 (0.38)	0.26 (0.40)

$$CET = C + \frac{Mn + Mo}{10} + \frac{Cr + Cu}{20} + \frac{Ni}{40}$$

$$CEV = C + \frac{Mn}{6} + \frac{Cr + Mo + V}{5} + \frac{Cu + Ni}{15}$$

## TOLERANCES

More details are given on [www.ssab.com](http://www.ssab.com).

### Thickness

Tolerances according to Strenx Thickness Guarantees. Strenx Guarantees offer considerably narrower thickness tolerances compared to EN 10 051.

### Length and Width

Width and length tolerances according to SSAB standard. The SSAB standard offer narrower width and length tolerances compared to EN 10 051. Length tolerances only apply for cut to length sheets.

### Shape

Tolerances according to EN 10 051. Narrower tolerances according to the SSAB standard are available on request.

### Flatness

Tolerances according to Strenx Flatness Guarantees Class A. Strenx Flatness Guarantees offer narrower tolerances compared to EN 10 051. Flatness guarantees only apply for cut to length sheets.

### Surface Properties

According to EN 10 163-2 Class A, Subclass 3.

## DELIVERY CONDITIONS

Thermomechanically Rolled. StrenX 700 MC Plus is available in as rolled or pickled surface condition.

## FABRICATION AND OTHER RECOMMENDATIONS

### Welding, bending and machining


Strenx 700 MC Plus has good welding, cold forming and cutting performance.

Strenx 700 MC Plus is a cold forming steel not suited for heat treatments at temperatures above 580°C since the material then may

# STRENX 700 MC PLUS

lose its guaranteed properties.

For information concerning fabrication, see SSAB's brochures on [www.ssab.com](http://www.ssab.com) or consult Tech Support, [techsupport@ssab.com](mailto:techsupport@ssab.com). Appropriate health and safety precautions must be taken when bending, welding, cutting, grinding or otherwise working on the product.

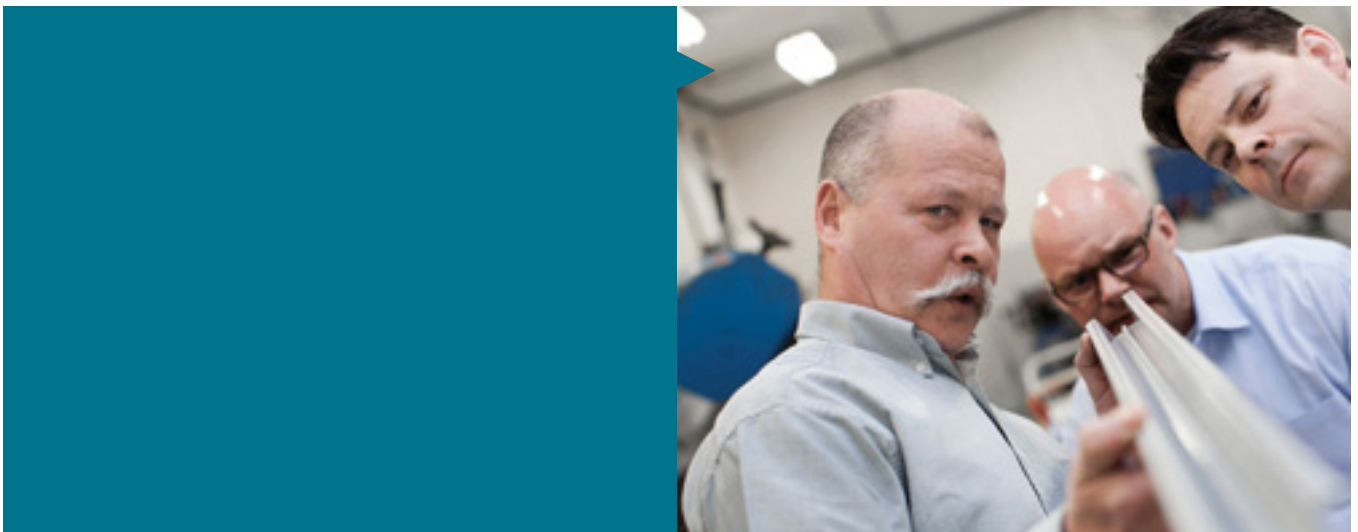

The UK English version of this document shall prevail in case of discrepancy. Download the latest version of this document at [www.ssab.com](http://www.ssab.com)

Hardox, Strenx, Docol, Dogal, Domex, Toolox, Laser, ArmoX, Ramor, GreenCoat are trademarks of SSAB Technology AB, Sweden

[www.ssab.com](http://www.ssab.com)

DATA SHEET 2009 STRENX 700 MC PLUS 2015-04-08

**SSAB**